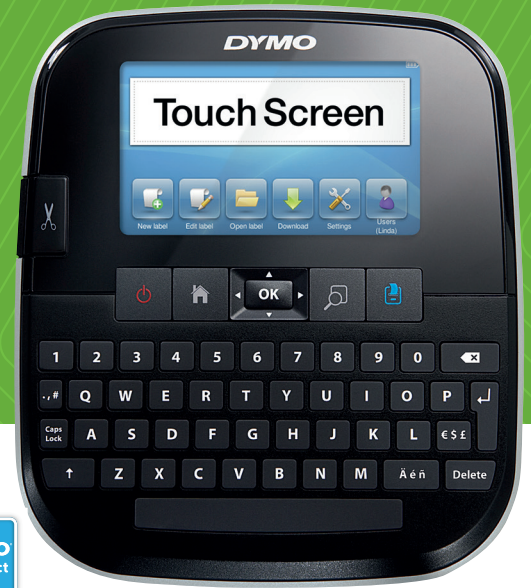# DYMO®

# LabelManager™ 500TS

D1

## CREATE LABELS FAST WITH SMART KEYS

Use the full-colour touchscreen and computer-style keyboard, or use PC and MAC® connectivity via DYMO® Connect, to format, create and print labels fast.

### Features

- Full-colour touchscreen
- PC and MAC® connectivity with DYMO Connect
- Save up to 500 frequently used labels
- Store up to 5 different user profiles
- 70+ ways to format text
- 200+ symbols and clip-art images
- Print barcodes-UPC-E, Code 39, Code 128, EAN13, EAN8, UPC-A
- Print up to 1 in (24 mm) wide labels
- For even more features, download DYMO® Connect

## Single Unit Includes:

- LabelManager 500TS
- Rechargeable Lithium-Ion Battery
- D1 Starter Label Cassette, 24mm x 3m Black on White
- Charging Adapter
- USB Cable
- Quick Start Guide
- 2 + 1 - Year Limited Warranty*

### Quick Specs

| | |
|---|---|
| Unit Dimensions (H x W x L) | 104 x 215 x 57 mm |
| Weight (excluding battery) | 415 g |
| Mac®/PC Compatible | Yes via DYMO Connect |
| Accepts Label Sizes | 6mm, 9mm, 12mm, 19mm and 24mm |
| Tape Platform | D1, Durables |
| Resolution | 300 dpi |
| Printing System | Thermal Transfer |
| Print Speed | 20 mm/sec |
| Barcodes | Yes |
| Cutter Type | Automatic |
| Batteries | Rechargeable |
| Adapter | Yes |
| Networking | No |
| Country of Origin | China |

| Item Number | Description | | Length (cm) | Width (cm) | Height (cm) | QTY | EAN | Customer Price |
|---|---|---|---|---|---|---|---|---|
| S0946420 | LabelManager 500TS QWERTY | Unit | 12.3 | 31.2 | 23.5 | 1 | 3501170946428 | |
| Accessories (www.dymo.com) | | | | | | | | |
| S0721430 | Charging Adapter | Unit | 11.5 | 6.0 | 9.0 | | - | |

\* +1 year if registered on the Dymo website

# D1 Standard Polyester Labels

For hundreds of tasks around the office or home office, such as filing, storage and asset tracking.
Temperature rating: -18°C to 90°C

| D1 STANDARD LABELS (3 m) | 6 mm | 9 mm | 12 mm | 19 mm | 24 mm |
|---|---|---|---|---|---|
| ABC | - | - | 2084349 | - | - |
| ABC | - | - | 2084401 | - | - |
| **D1 STANDARD LABELS (7 m)** | **6 mm** | **9 mm** | **12 mm** | **19 mm** | **24 mm** |
| ABC | S0720780 | S0720680 | S0720530 | S0720830 | S0720930 |
| ABC | S0720770 | S0720670 | S0720500 | S0720820 | S0720920 |
| ABC | S0720790 | S0720730 | S0720580 | S0720880 | S0720980 |
| ABC | - | S0720710 | S0720560 | S0720860 | – |
| ABC | - | S0720740 | S0720590 | S0720890 | – |
| ABC | - | S0720720 | S0720570 | S0720870 | S0720970 |
| ABC | - | - | S0720610 | S0720910 | S0721010 |
| ABC | - | S0720690 | S0720540 | S0720840 | – |
| ABC | - | - | S0720510 | – | – |
| ABC | - | - | S0720600 | – | – |
| ABC | - | S0720700 | S0720550 | – | – |
| ABC | - | - | S0720520 | – | – |
| **D1 STANDARD MULTIPACKS (7 m)** | **6 mm** | **9 mm** | **12 mm** | **19 mm** | **24 mm** |
| ABC | - | 2093096 | 2093097 | 2093098 | - |

# D1 Durable Vinyl Labels

Industrial strength adhesive helps to ensure labels stay stuck to a variety of surfaces.
Temperature rating: -40˚C to 80˚C

| D1 DURABLE LABELS (3 m) | 12 mm |
|---|---|
| ABC | 1978366 |
| ABC | 1978365 |
| ABC | 1978367 |
| **D1 DURABLE LABELS (5.5 m)** | **12 mm** |
| ABC | 1978364 |

# D1 Permanent Polyester Labels

Professional, polished finish ideal for panels, blocks, faceplates, shelves, bins and more.

Temperature rating: -40˚C to 150˚C*

| D1 PERMANENT POLYESTER (5.5 m) | 12 mm | 19 mm |
|---|---|---|
| ABC | S0718060 | S0718050 |

*depends on surface

# D1 Flexible Nylon Labels

Specifically designed for curved surfaces and wire and cable marking.

Temperature rating: -40˚C to 60˚C

| D1 FLEXIBLE NYLON (3.5 m) | 12 mm | 19 mm |
|---|---|---|
| ABC | S0718040 | S0718070 |

The DYMO high quality labels are made in Belgium

**DYMO®**

**newell BRANDS**

© 2019 Newell Brands

ALWAYS USE
UTILISEZ TOUJOURS
**AUTHENTIC
AUTHENTIQUE**
DYMO
LABELS
ÉTIQUETTES